

Village of Hines Creek Council Request for Decision (RFD)

Meeting:	Regular Council Meeting
Meeting Date:	September 8, 2020
Originated By:	Leanne Walmsley, Chief Administrative Officer
Title:	Unfinished Business – Municipal Stimulus Program
File:	0413

BACKGROUND/PROPOSAL:

The Municipal Stimulus Program Agreement with Municipal Affairs was signed after the last Council meeting

C-280-20 RESOLUTION by Councillor Bjornson to enter into an Agreement with Her Majesty the Queen represented by the Minister of Municipal Affairs for the implantation of the Municipal Stimulus Program. CARRIED.

I spoke with Jeff Sulymka from Municipal Affairs on August 26, 2020.

Allocation is \$50,000.00 (one time program). We have 2 years to spend the money but the deadline for projects is October 1, 2020. There will be no other projects being awarded after the deadline.

Projects we outlined

1. Upgrade Water Treatment Plant – Qualifies
2. Bulk Water Valve replacement – Qualifies
(stay away from the credit card portion of a project like this as it is not covered)
3. Roof Top Furnace – Qualifies
4. Lagoon Fencing – Qualifies
5. Backup Generators for Lift Station and Arena – Qualifies

Projects will be prioritized by making sure there is job creation involved.

Projects are submitted on line at: <https://www.alberta.ca/municipal-stimulus-program.aspx> or directly to Jeffery.Sulymka@gov.ab.ca

RECOMMENDED ACTION:

Initials show support- Reviewed by:	Manager:	C.A.O. <i>AW</i>
-------------------------------------	----------	------------------

4.c.



Village of Hines Creek Council Request for Decision (RFD)

Meeting:	Regular Council Meeting
Meeting Date:	September 8, 2020
Originated By:	Kimberley Kuntz, Administrative Assistant
Title:	Unfinished Business Municipal Stimulus Program - Roof Top Furnace Replacement
File:	0217

BACKGROUND/PROPOSAL:

An agreement was signed on August 25, 2020 to enter into the Municipal Stimulus Program. One of the approved projects is the replacement of the two roof top furnaces at the Municipal Office.

North Peace Gas was contacted and supplied the Village with the following:

Furnace cost: $\$7000.00 \times 2 = \$14,000.00$

Picker truck: $\$230/\text{hr} \times 5 \text{ hrs} = \1150.00

Total: \$15,150.00

Shipping, GST and installation are not included in the pricing.

RECOMMENDED ACTION:

That Council review furnace replacement pricing.

Initials show support- Reviewed by:	Manager:	C.A.O. <i>LW</i>
-------------------------------------	----------	------------------

Replacement of Roof Units at Village Office Complex.

Made a call to north peace gas and in return he made a quick call to supplier.

An approximate Ball park without too many specifics is \$7000 for each unit alone.

There would be shipping and installation on top of this.

As another cost would be picker truck for a total of 4-5hrs at approx. \$230/hr.

Depending on current product available there may be some curb work on roof and may be difficult to find exactly same dimensions.

Village of Hines Creek Council Request for Decision (RFD)

Meeting:	Regular Council Meeting
Meeting Date:	September 8, 2020
Originated By:	Kimberley Kuntz, Administrative Assistant
Title:	Unfinished Business Municipal Stimulus Program – Backup Generators for Lift Station and Dave Shaw Complex
File:	0217

BACKGROUND/PROPOSAL:

An agreement was signed on August 25, 2020 to enter into the Municipal Stimulus Program. One of the approved projects is the purchase backup generators to run the lift station and Dave Shaw Complex in the event of an emergency.

Lift Station Generators:

Generac 22 KW:	\$9,299.00
Isuzu 27 KW:	\$19,900.00
Wacker 20 KW:	\$12,000.00 (Used)-Mounted on a trailer
Doosan 20KW:	\$14,500.00 (Used)-Mounted on a trailer
Atlas Copco 25KW:	\$22,000.00 (Used)-Mounted on a trailer

Dave Shaw Complex Generators:

Generac 80KW:	\$24,399.00
Generac 130KW:	\$28,659.00

Prices do not include GST

RECOMMENDED ACTION:

That Council review generator pricing.

Initials show support- Reviewed by:	Manager:	C.A.O. <i>LW</i>
-------------------------------------	----------	------------------

Village of Hines Creek Council Request for Decision (RFD)

Meeting:	Regular Council Meeting
Meeting Date:	September 8, 2020
Originated By:	Kimberley Kuntz, Administrative Assistant
Title:	Unfinished Business Municipal Stimulus Program - Lagoon Fence Repairs
File:	0305

BACKGROUND/PROPOSAL:

An agreement was signed on August 25, 2020 to enter into the Municipal Stimulus Program. One of the approved projects is fence replacement for the sewer lagoon (estimated perimeter-1385 m) and water treatment plant, which has a short section the needs replaced (estimated length 240 m). Total length of fencing: 1625 meters

For 6' chain link the estimated cost is:

Duraguard Fence: \$41/ meter X 1400 meters =\$57,400.00

Priority Chain Link: \$49.83 X 1400 meters=\$69,763.18 *this price includes 1 20' gate and 1 4' gate*

Please note these are rough quotes for budgeting purposes. A site visit and fence layout would be required for a solid quote.

RECOMMENDED ACTION:

That Council review fencing quotes.

Initials show support- Reviewed by:	Manager:	C.A.O. <i>fw</i>
-------------------------------------	----------	------------------



BAY 3, 9116 - 111 STREET
GRANDE PRAIRIE, AB. T8V 4W1

PHONE: (780) 832-0000
FAX: (780) 832-0486
pradmin@telus.net

Quotation

Customer:

**KIM
HINES CREEK
LAGOON PONDS**

**Quotation Number: 4696
Quotation Date: 09-02-2020
Phone Number: 780 494-3690**

We are pleased to offer our quotation for fencing based on the following:

Materials:

Terminal Post:	7	3 1/2 IN. X 9.0 FT. .125 WALL H.D.GALV. PIPE
Line Post:		2 3/8 IN. X 8.0 FT. .083 WALL H.D.GALV. PIPE
Top Rail:		1 5/8 IN. SWEDGE END X 21 FT. .083 WALL H.D. GALVANIZED PIPE
Chain Link Mesh:		2 IN. X 9 GA. X 72 IN. STD. GALVANIZED FABRIC
Gate:	1	4 FT. (W) X 6 FT. (H) FFH SGL SWING IND. GATE
Gate:	1	20 FT. (W) X 6 FT. (H) FFH DBL SWING IND. GATE

Site Information:


Overall Height	6 Ft.	Top Rail	included
Fence Length	4,593.0 Ft. 1400 m	Bottom Wire	included
Gate Length	24.0 Ft.		
Overall Length	4,617.0 Ft.		
Post Spacing	10 Ft.		
Material Weight	31,611.5 Lbs.		

*****BUDGETARY PURPOSES ONLY*****

A SITE VISIT & FENCE LAYOUT WOULD BE REQUIRED.

Expected Delivery:	Terms:	Installed Amount	\$69,763.18
		G.S.T.	3,488.16
Priority Sales Agent	Accepted by:	Installed Total	\$73,251.34
Doug Law			

This quotation is firm for 30 days and is subject to the terms and conditions shown herein or the following page.

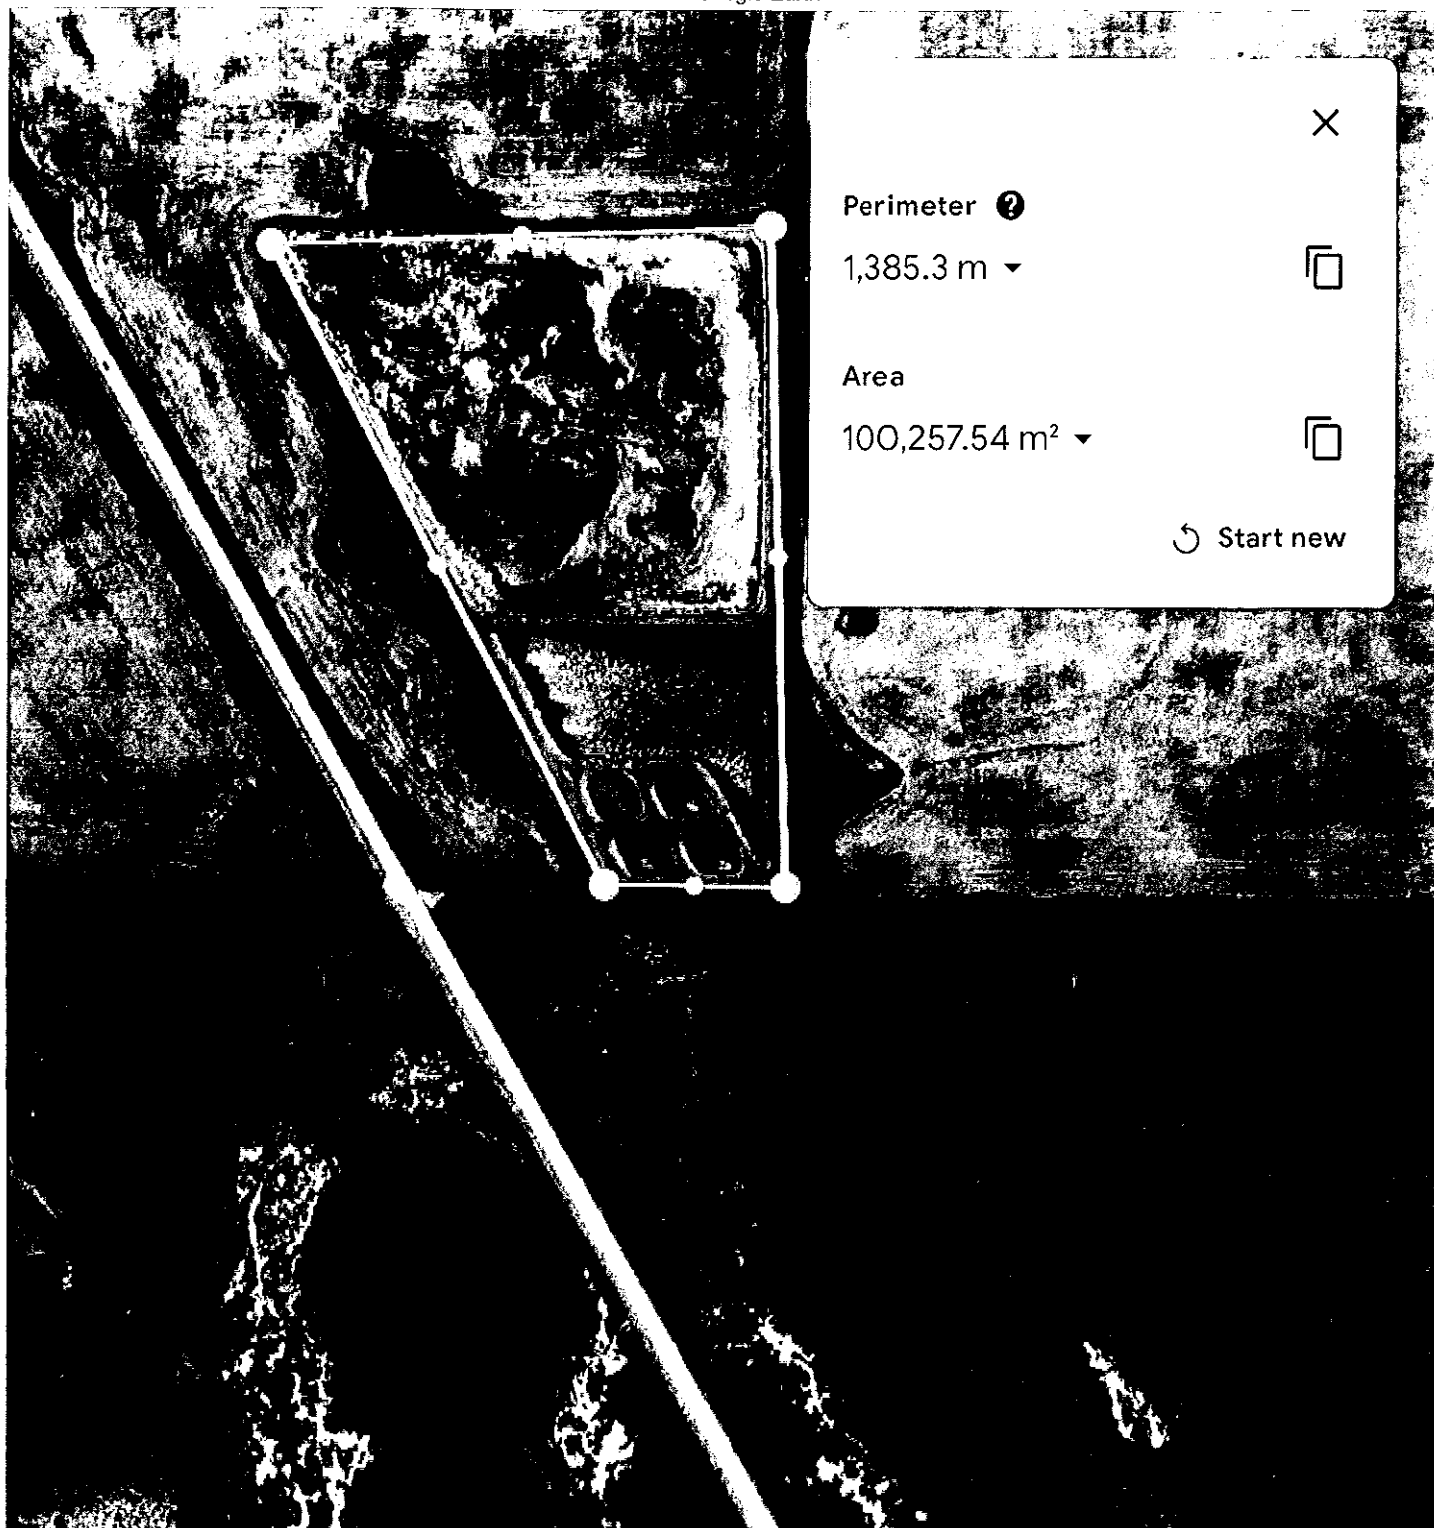

Perimeter ?

1,385.3 m ▼



Area

100,257.54 m² ▼



↻ Start new





+

